

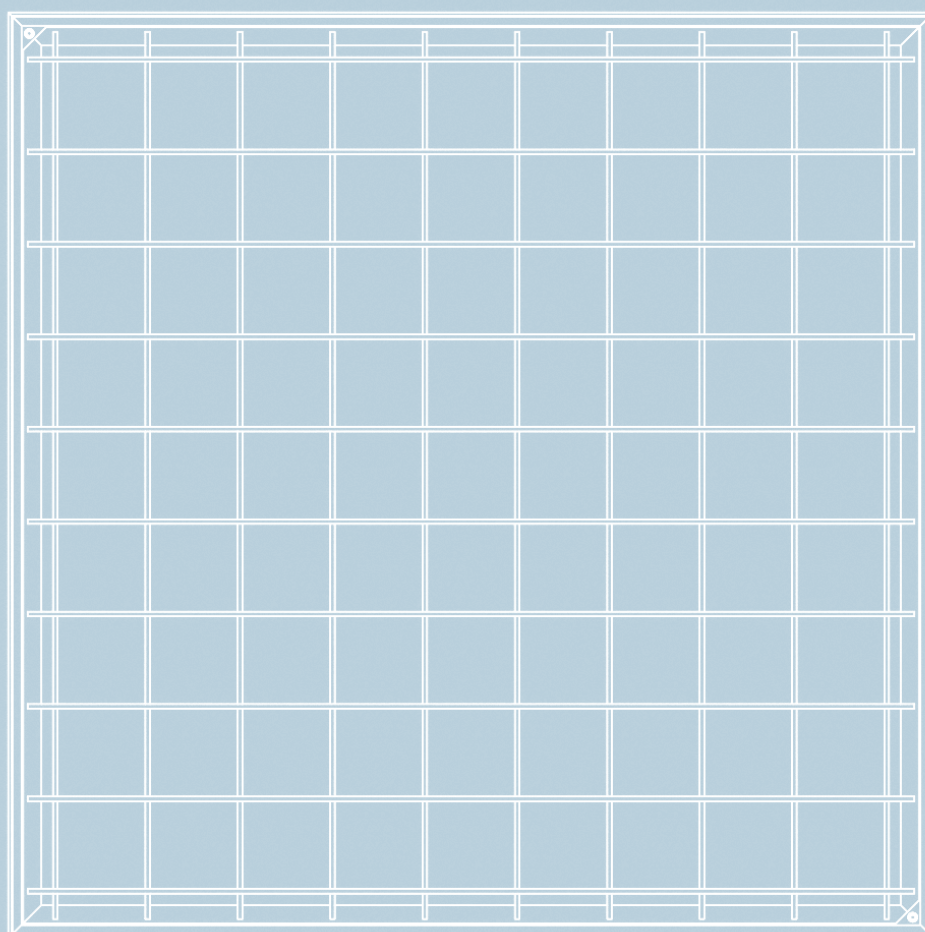


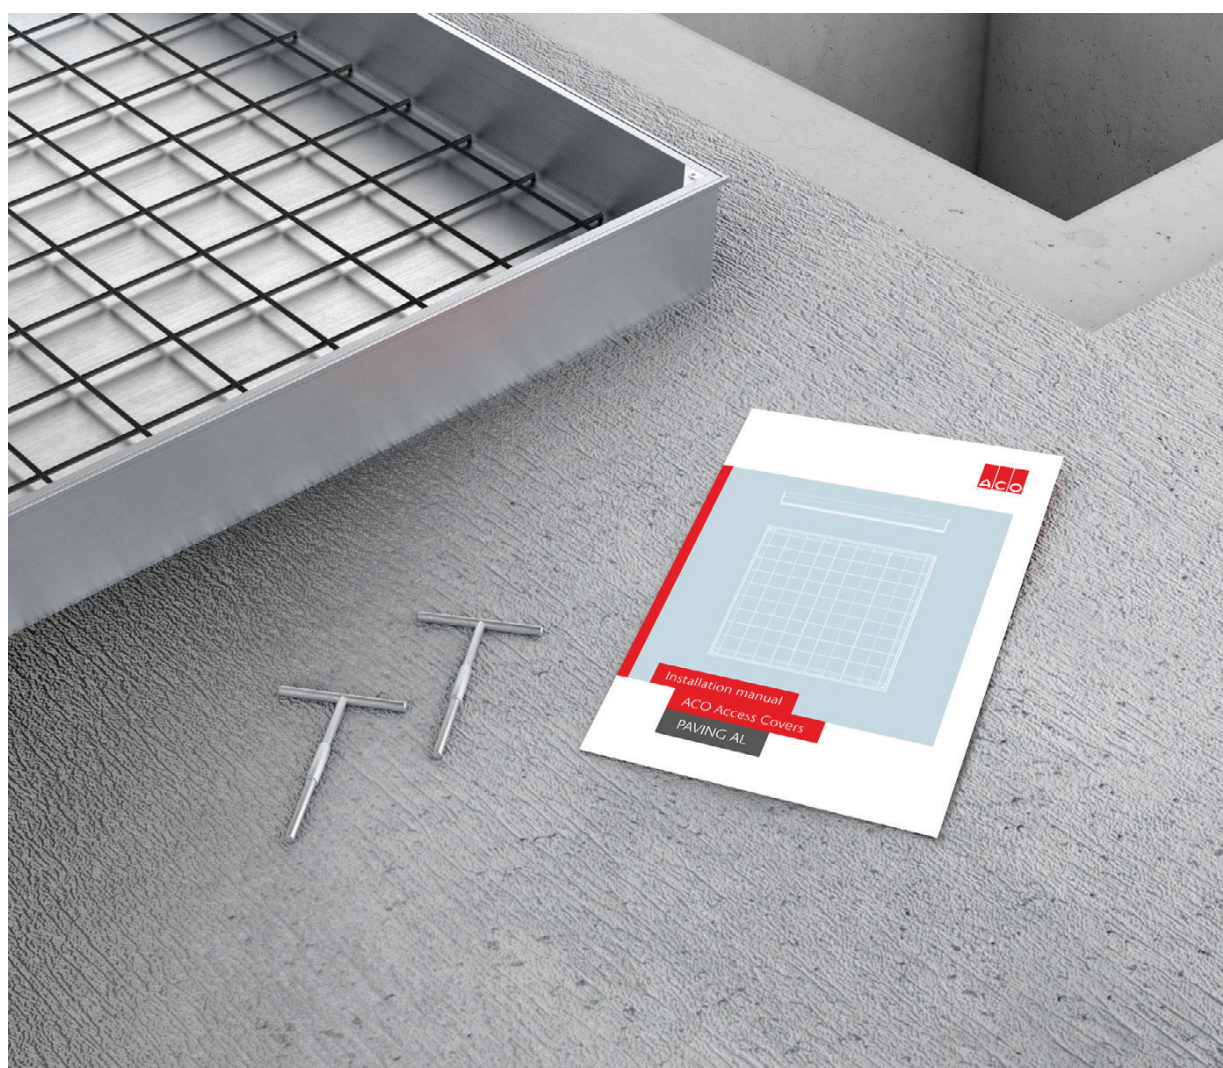

Upute za ugradnju

ACO Pristupni poklopci

PAVING AL


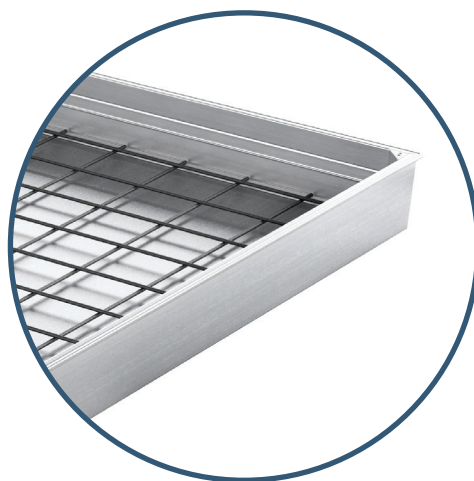






ACO Pristupni Poklopac PAVING AL

Podaci za narudžbu



Svijetli otvor (A x B)	Vanjske dimenzije (C x D)	Visina rama	Dubina poklopca	Prostor za završnu oblogu	Razred opterećenja (BAS EN 124)	Težina	Art.br.
[mm]	[mm]	[mm]	[mm]	[mm]		[kg]	
230 x 230	300 x 300	107	95	do 65	30kN	3,3	450337
330 x 330	400 x 400	107	95	do 65	30kN	4,9	450338
430 x 430	500 x 500	107	95	do 65	30kN	6,5	450339
530 x 530	600 x 600	107	95	do 65	30kN	8,3	450340
630 x 630	700 x 700	107	95	do 65	30kN	10,2	450341
730 x 730	800 x 800	107	95	do 65	30kN	12,3	450342
830 x 830	900 x 900	107	95	do 65	30kN	14,6	450343
930 x 930	1000 x 1000	107	95	do 65	30kN	17,3	450344
200 x 200	270 x 270	107	95	do 65	30kN	2,9	450345
300 x 300	370 x 370	107	95	do 65	30kN	4,4	450346
450 x 450	520 x 520	107	95	do 65	30kN	5,7	450347
500 x 500	570 x 570	107	95	do 65	30kN	7,3	450348
600 x 450	670 x 520	107	95	do 65	30kN	8,0	450349
600 x 600	670 x 670	107	95	do 65	30kN	9,1	450350
750 x 600	820 x 670	107	95	do 65	30kN	11,0	450351
750 x 750	820 x 820	107	95	do 65	30kN	13,0	450352
900 x 600	970 x 670	107	95	do 65	30kN	12,0	450353
900 x 750	970 x 820	107	95	do 65	30kN	14,0	450354
900 x 900	970 x 970	107	95	do 65	30kN	15,1	450355

Upute za ugradnju
ACO PAVING AL pristupni poklopci

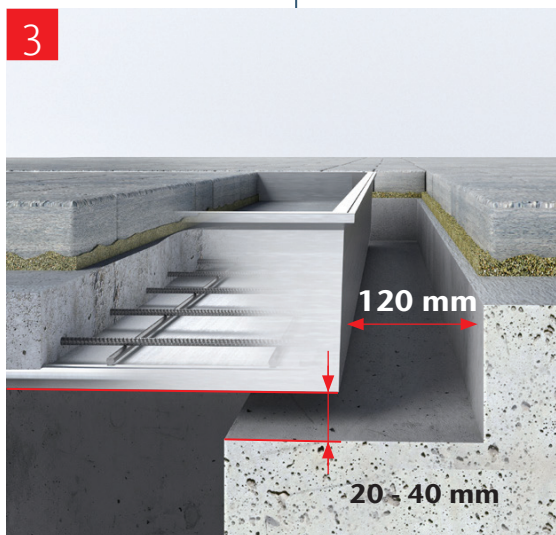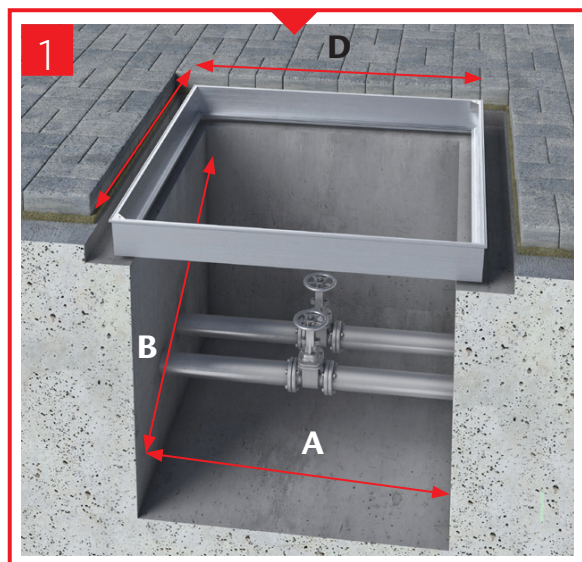

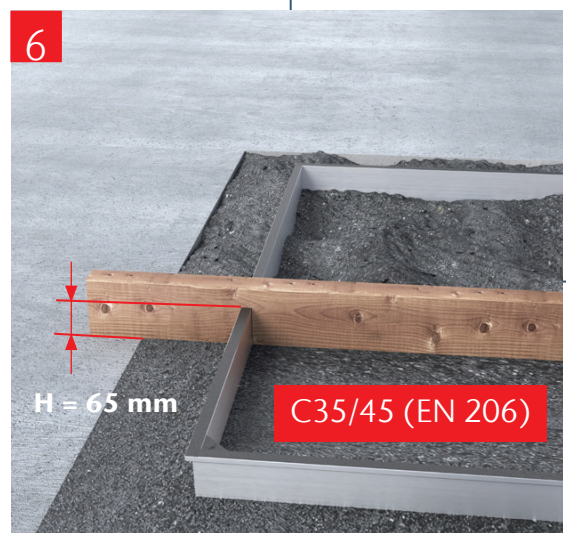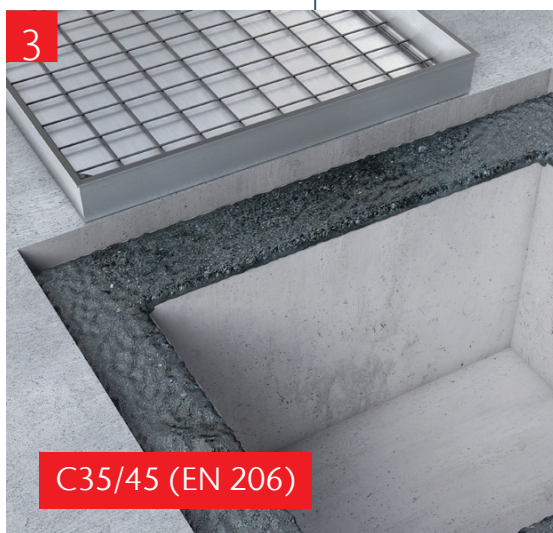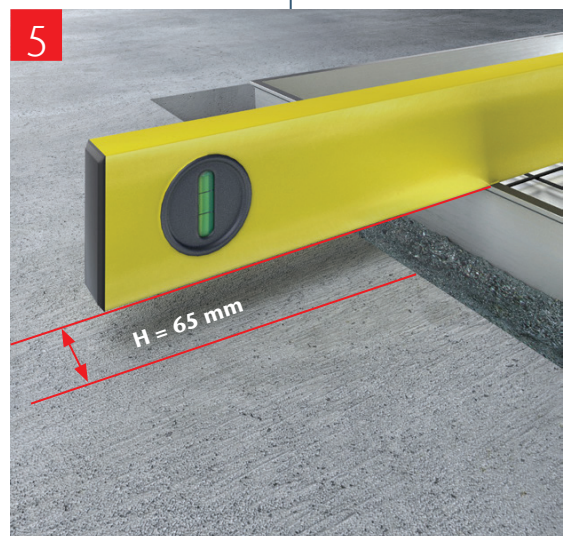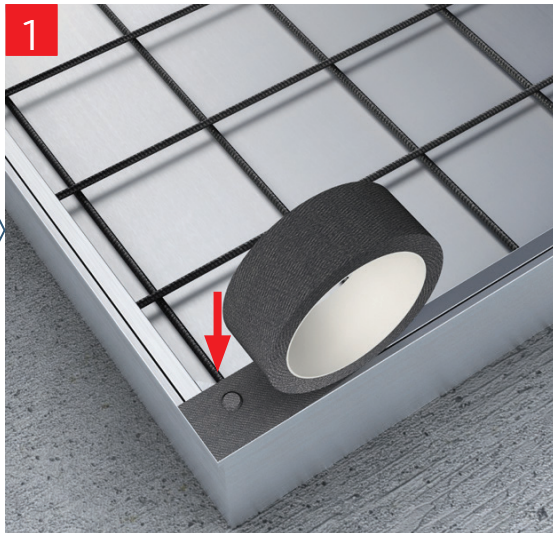


Upute za ugradnju
ACO PAVING AL pristupni poklopci

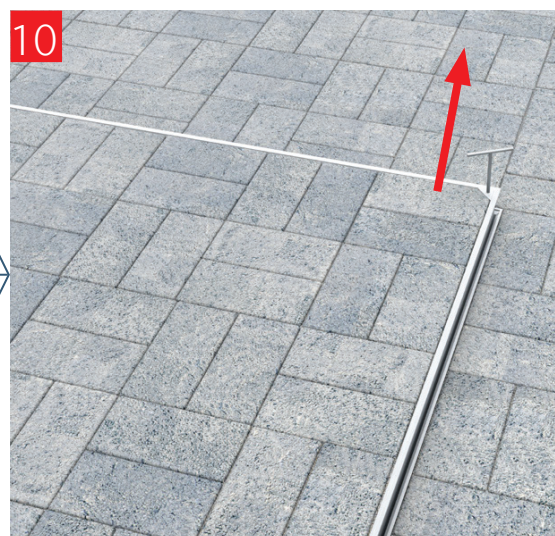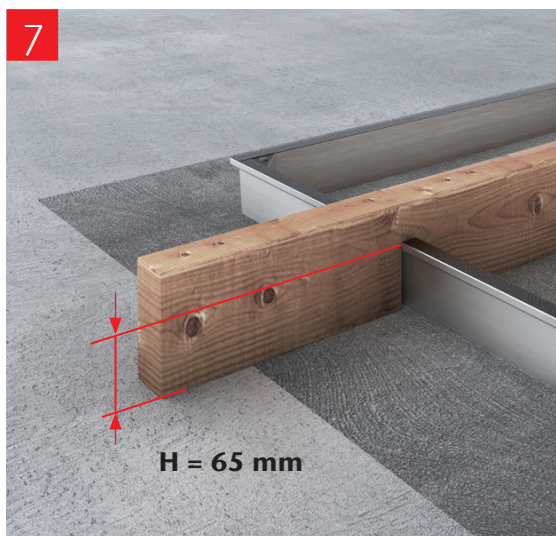



Svaki ACO proizvod
podržava ACO WaterCycle

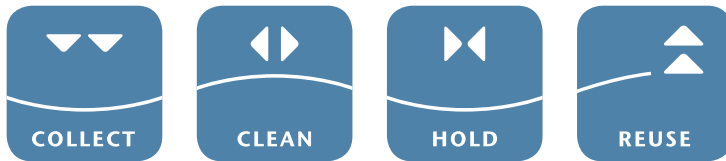

-
- ACO UNIFACE
 - ACO PAVING
 - ACO SOLID
-

ACO d.o.o.

Ismeta Alajbegovića Šerbe 12
71210 Sarajevo-Ilidža

www.aco.ba